SPRING PUSH STANDARD BG/5/S & DK/10/S AT MIDRANGE
USING ∅8mm TRANSDUCER WITH AXIAL CABLE OUTLET

DOVETAIL TO BS EN ISO 9493:2010

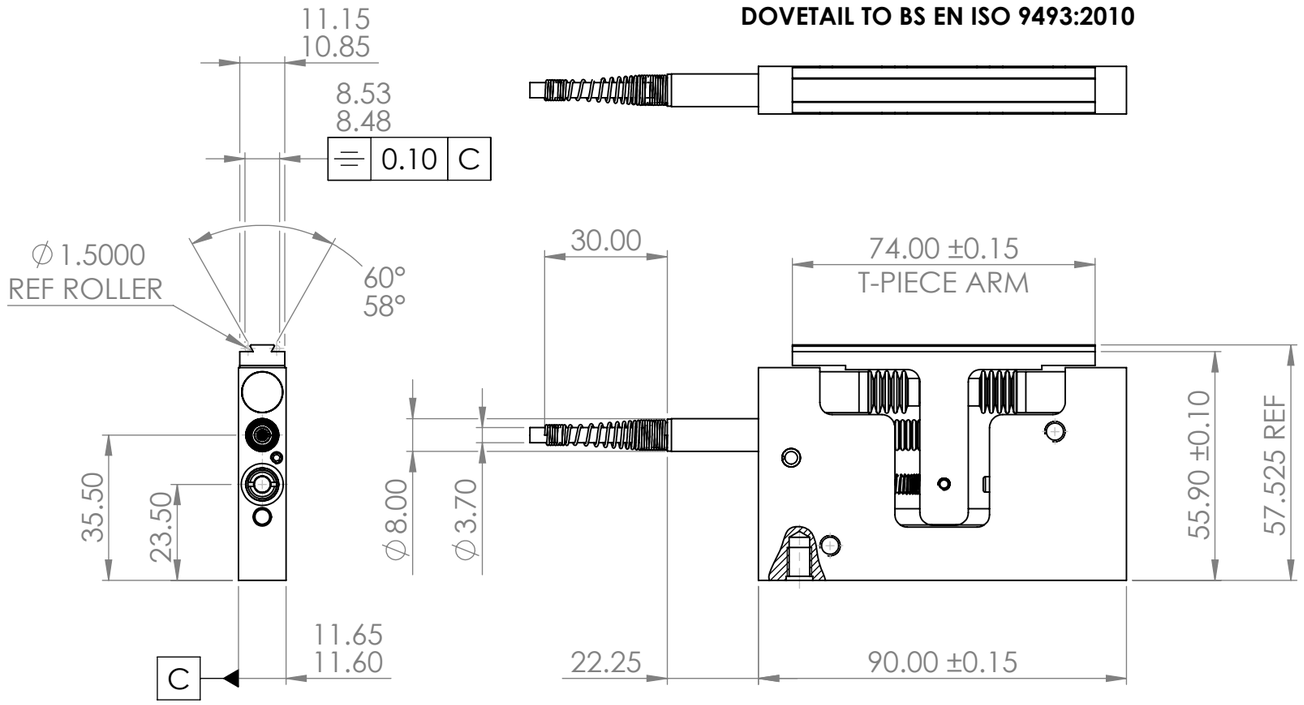

SPRING PUSH STANDARD BGR/5/S & DKR/10/S AT MIDRANGE
USING ∅8mm TRANSDUCER WITH RADIAL CABLE OUTLET

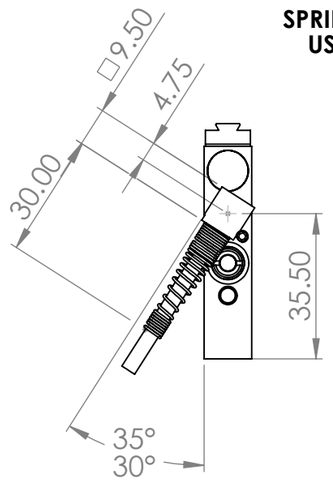

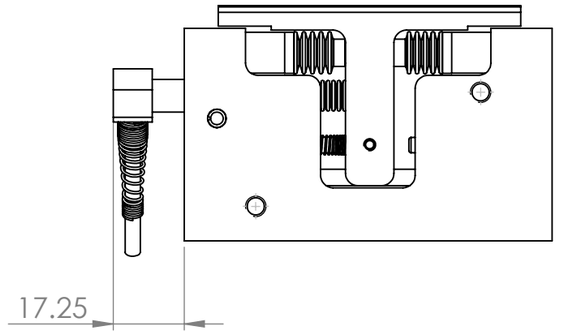

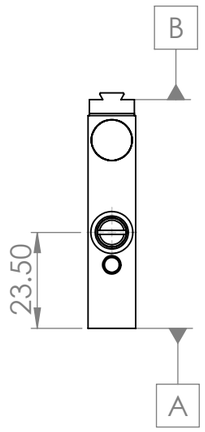

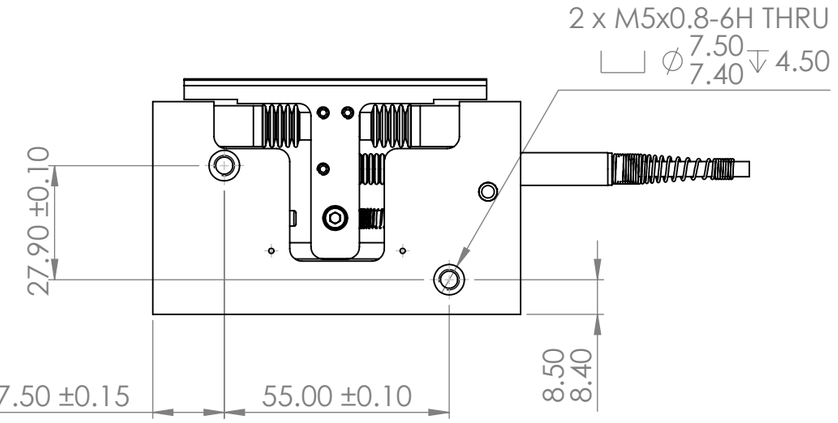

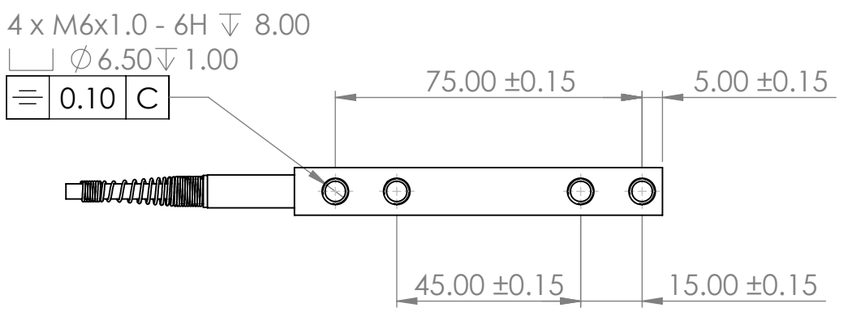

PNEUMATIC STANDARD BG/5/P & DK/10/P AT MIDRANGE
USING ∅8mm TRANSDUCER WITH AXIAL CABLE OUTLET



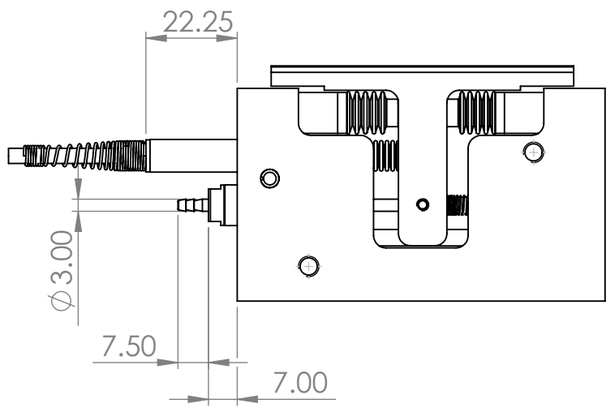

Solartron Metrology STEYNING WAY • BOGNOR REGIS • SUSSEX • ENGLANG • PO22 9ST	DRAWING NUMBER 540002-081	TITLE BLOCK GAUGE BG/5 & DK/10	E.D.C.R.	23669
			ISSUE	9

SOLARTRON PURSUES A POLICY OF CONTINUOUS DEVELOPMENT. SPECIFICATIONS IN THIS DOCUMENT MAY THEREFORE BE CHANGED WITHOUT NOTICE. DIMENSIONS ARE NOMINAL AND SPECIFIED IN MILLIMETRES

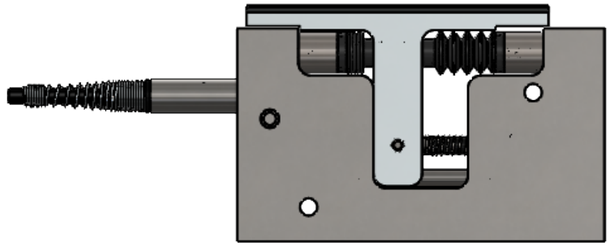

BG/5/R(H) OR DK/10/R
REVERSED ACTION

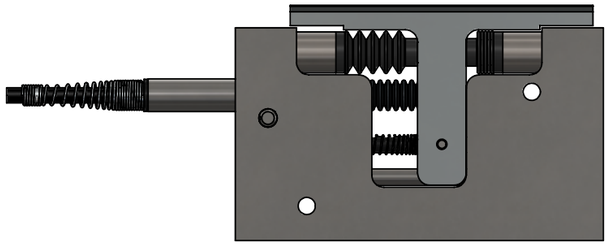

BG/5/S(H) OR DK/10/S
STANDARD

NOTES:-

1. ALL BLOCK GAGE PRODUCTS ARE SHOWN IN THE REST POSITION.
2. FOR PRODUCTS WITH RIGHT ANGLE CABLE OUTLET:
   - **a. CABLE OUTLET ANGLE EQUALS 30°-35°:-**
     - FOR ALL STANDARD SPRING PUSH BLOCKS.
     - FOR BLOCKS WITH PNEUMATIC CYLINDER FITTED FROM OPPOSITE SIDE TO THE TRANSDUCER.
   - **b. CABLE OUTLET ANGLE EQUALS 45°-50°:-**
     - FOR BLOCKS WITH PNEUMATIC CYLINDER FITTED ON THE SAME SIDE AS TRANSDUCER.
3. **IMPORTANT.** IF RETROFIT CYLINDER IS CONSIDERED FOR PRODUCTS WITH RADIAL CABLE OUTLET, PLEASE SEE NOTE 2 b.

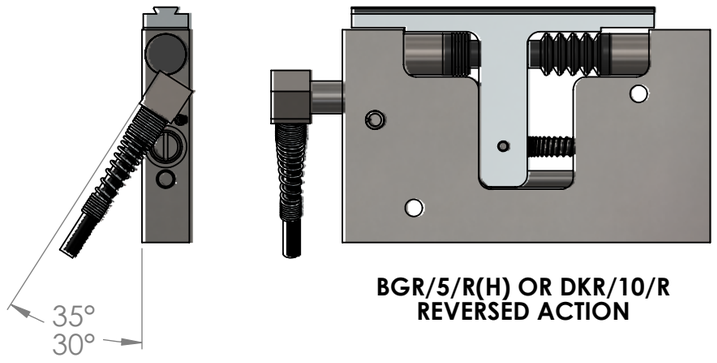

BGR/5/R(H) OR DKR/10/R
REVERSED ACTION

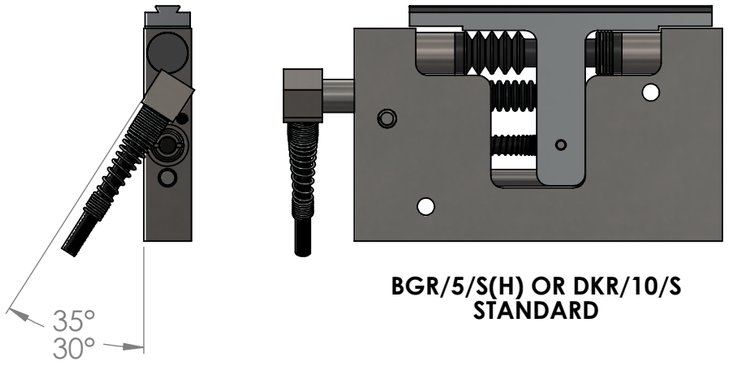

BGR/5/S(H) OR DKR/10/S
STANDARD

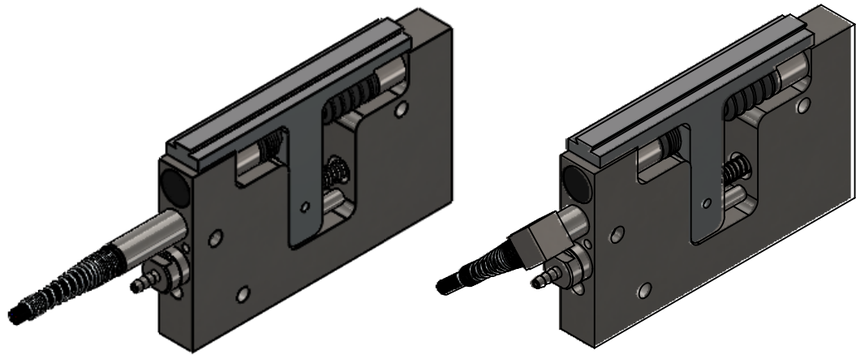

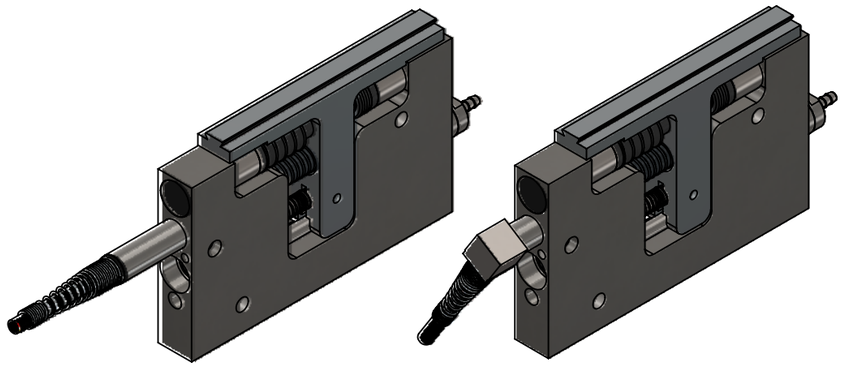

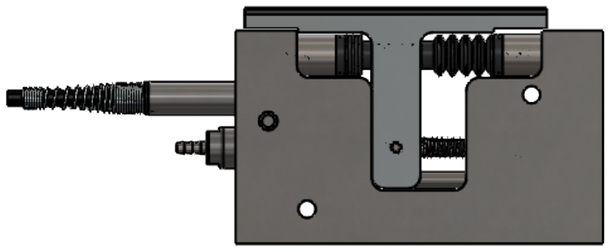

BG/5/P(H) OR DK/10/P
STANDARD

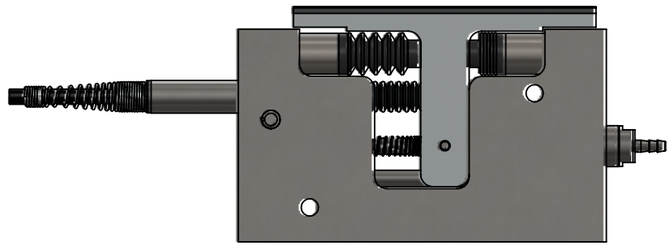

BG/5/RP(H) OR DK/10/RP
REVERSED ACTION

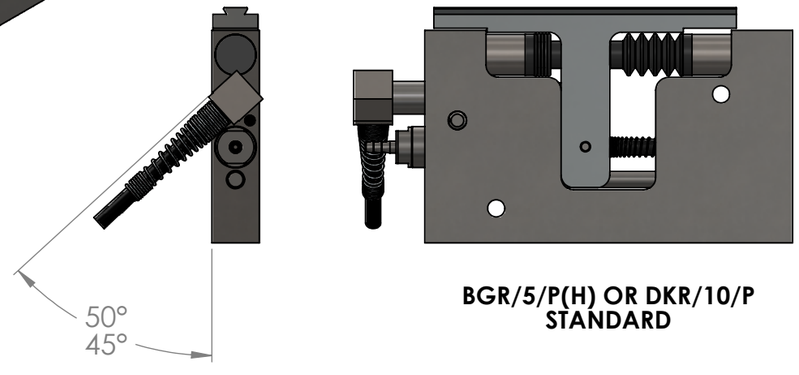

BGR/5/P(H) OR DKR/10/P
STANDARD

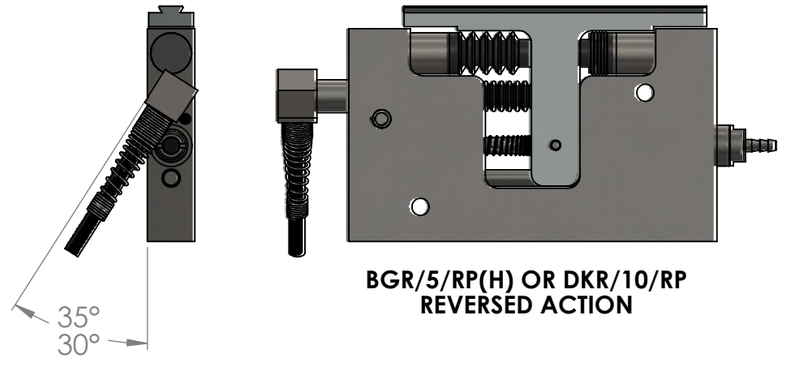

BGR/5/RP(H) OR DKR/10/RP
REVERSED ACTION

Solartron Metrology STEYNING WAY • BOGNOR REGIS • SUSSEX • ENGLANG • PO22 9ST	DRAWING NUMBER 540002-081	TITLE BLOCK GAUGE BG/5 & DK/10	E.D.C.R.	23669
			ISSUE	9

SOLARTRON PURSUES A POLICY OF CONTINUOUS DEVELOPMENT. SPECIFICATIONS IN THIS DOCUMENT MAY THEREFORE BE CHANGED WITHOUT NOTICE. DIMENSIONS ARE NOMINAL AND SPECIFIED IN MILLIMETRES

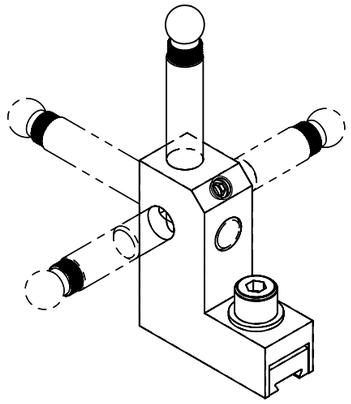

804798-SX TOOL HOLDER ASSY BG/5 & DK/10 - ∅6mm - DOVETAIL
DOVETAIL TO BS EN ISO 9493:2010
TIP & TOOL HOLDER SHOWN FOR ALTERNATIVE POSITION ONLY

TIPS
STANDARD 008305-005
VARIOUS TIPS AVAILABLE
FOR DIFFERENT APPLICATIONS

TOOL HOLDERS
208453/30
RECOMMENDED 208453/40
208453/50

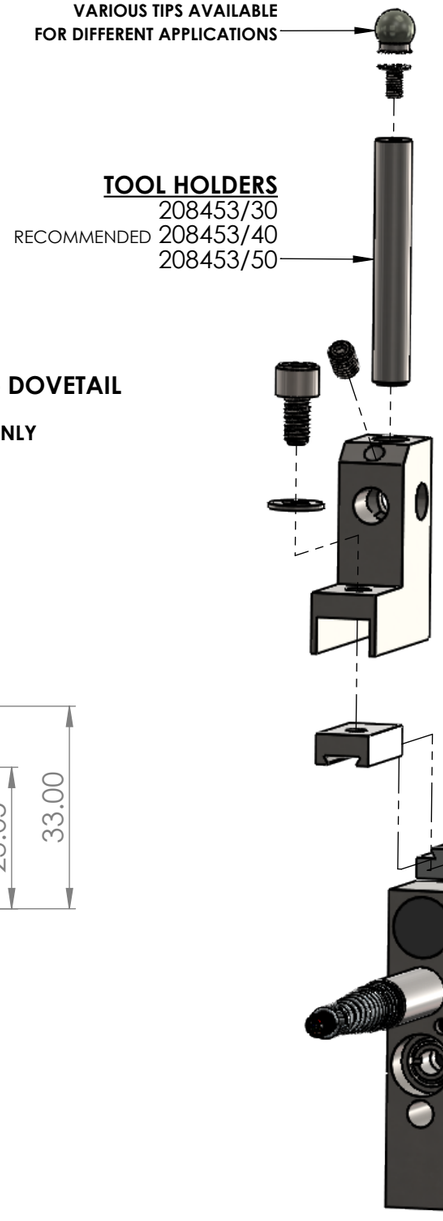

TOOL HOLDER -ASSEMBLED

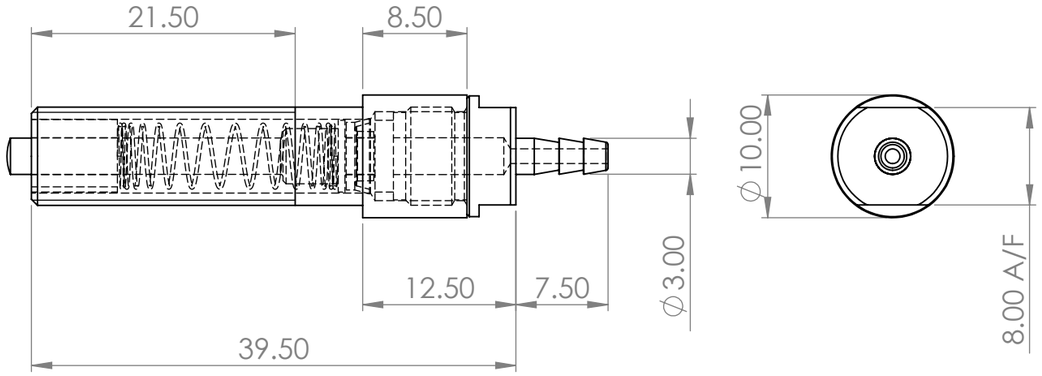

805493-SX CYLINDER M8x0.75-6g WITH SPRING RETURN

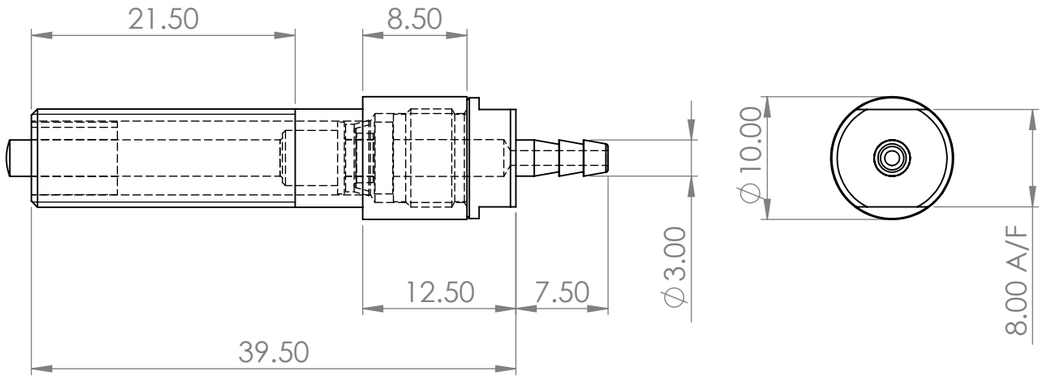

805490-SX CYLINDER M8x0.75-6g

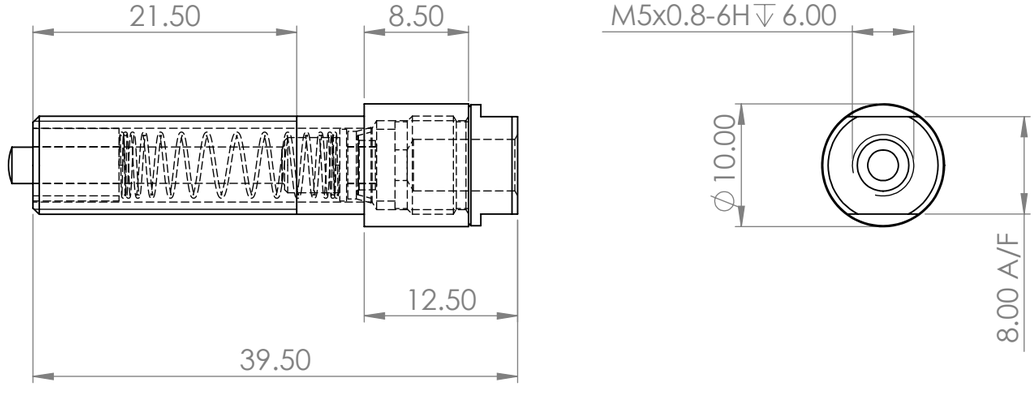

806016-SX CYLINDER M8x0.75-6g WITH SPRING RETURN
FOR COMMERCIAL PNEUMATIC TUBE ADAPTERS/COUPLINGS

BLOCK GAUGE ACCESSORIES

Solartron Metrology STEYNING WAY • BOGNOR REGIS • SUSSEX • ENGLANG • PO22 9ST	DRAWING NUMBER 540002-081	TITLE BLOCK GAUGE BG/5 & DK/10	E.D.C.R.	23669
			ISSUE	9

SOLARTRON PURSUES A POLICY OF CONTINUOUS DEVELOPMENT. SPECIFICATIONS IN THIS DOCUMENT MAY THEREFORE BE CHANGED WITHOUT NOTICE. DIMENSIONS ARE NOMINAL AND SPECIFIED IN MILLIMETRES